STEPS TO WIFI FIRMWARE UPDATE

It is very important to carry out the 3 updates (V2.00 and V2.06 STEP1 and V2.06 STEP2) at the same time and in the correct order. Otherwise a permanent programme error could occur!
If your station already has firmware 2.0x, you only need to update steps 1 and 2.

WIFI firmware:
The WIFI firmware is not installed using the USB stick, but via WIFI and with the help of a PC and a web browser.
This means:
1: Download the latest version of the firmware V2.00 to your PC/Mac using the following link:
https://nextcloud.bresser.de/s/EGzcDkA92tjy9D4
It is important to install version V2.00 first and then version V2.06

2. Set the console to AP mode (Access Point) and connect the PC/Mac to the console (see section "Configuration / Setting up a WIFI connection" in the operating instructions).

3. Click on the Browse section in the firmware update and browse to the location of the file you downloaded and extracted in step 1. Please upload the file: " 20001001_v2.00_a_d_OTA.bin".

4. Click on the corresponding UPLOAD button to start the transfer of the firmware file to the console.

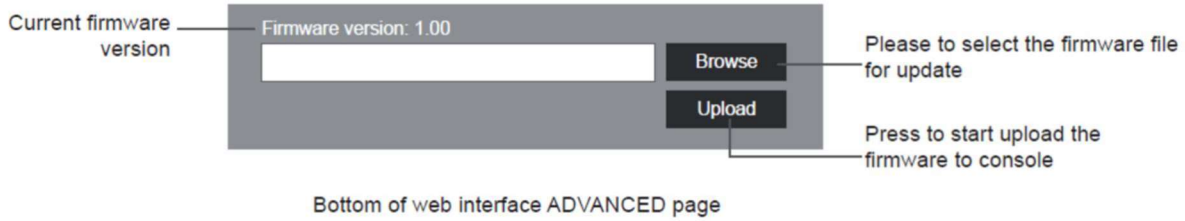

Bottom of web interface ADVANCED page

5. In the meantime, the console performs the update automatically and shows the progress of the update on the display. (The updating time is about 1 ~ 2 minutes).

6. The console will restart as soon as the update is complete.

STEP 1:
Repeat steps 1-6 with the firmware version V2.06 STEP1.
Link: https://nextcloud.bresser.de/s/NNq5rn5D2tDAa3c
Repeat steps 1-6 with firmware version 20001001_v2.06_STEP1_OTA.
In step 3, please upload the file"20001001_v2.06_a_d_OTA.bin"

STEP 2:
And then with the firmware version V2.06 STEP2.
Link: https://nextcloud.bresser.de/s/mWSNgb7WwR7LESS
Repeat steps 1-6 with firmware version 20001001_v2.06_STEP2_OTA.
In step 3, please upload the file" 20001001_v2.06_a_b_c_OTA.bin"

STEPS TO WIFI FIRMWARE UPDATE

IMPORTANT INFORMATION:
- Be sure to maintain the power supply to the unit during the firmware update!
- Make sure that the W-LAN connection of your PC/Mac is working and stable.
- During the update, do not operate the PC and the base station until the update is complete.
- During the firmware update, the base station will stop uploading data to the CloudServer. The base station will reconnect to your W-LAN router and upload the data again after the successful update. If the base station cannot connect to your router, please go to the SETUP page to set it up again.
- If the setup information is missing after the firmware update, please enter the setup information again.
- The firmware update process has a potential risk that cannot guarantee 100% success. If the update fails, please repeat the above step to perform the update again.